

**0445120106** Common Rail Injector Technical File

**SKU1: G1S80445120106**

**SKU2: DGH130445120106**

# COMMON RAIL INJECTORS



0445110  
0445120

X1 X2 C7  
G2 G3 G4

E1 E3  
C9 C-9

M11 N14  
XPI 320D

## 0445120106 Common Rail Injector Technical File

### Content

|                                                                                                |    |
|------------------------------------------------------------------------------------------------|----|
| 1. 0445120106 Common Rail Injector Introduction .....                                          | 2  |
| 1.1. 0445120106 Common Rail Injector Basic Information .....                                   | 2  |
| 1.2. 0445120106 Common Rail Injector Common Information .....                                  | 2  |
| 1.3. 0445120106 Common Rail Injector Part Number Common Writing .....                          | 2  |
| 1.4. 0445120106 Common Rail Injector Parameter .....                                           | 2  |
| 1.5. 0445120106 Common Rail Injector Quality Control .....                                     | 3  |
| 1.6. 0445120106 Common Rail Injector Customized Service .....                                  | 3  |
| 1.7. 0445120106 Common Rail Injector Packing List and Package Size .....                       | 4  |
| 1.8. 0445120106 Common Rail Injector Testing Standard and Certificate .....                    | 5  |
| 1.9. 0445120106 Common Rail Injector Warranty Instructions .....                               | 5  |
| 2. 0445120106 Common Rail Injector Technical Support .....                                     | 7  |
| 2.1. 0445120106 Common Rail Injector Part Number Location .....                                | 7  |
| 2.2. 0445120106 Common Rail Injector Application Scenarios .....                               | 7  |
| 2.3. 0445120106 Common Rail Injector Installation Precautions .....                            | 8  |
| 2.4. Reasons For 0445120106 Common Rail Injector Not Working Normally .....                    | 8  |
| 2.5. Causes of 0445120106 Common Rail Injector Being Damaged .....                             | 9  |
| 2.6. 0445120106 Common Rail Injector Storage Standard .....                                    | 9  |
| 2.7. 0445120106 Common Rail Injector Technical Support Obtaining Methods .....                 | 10 |
| 3. 0445120106 Common Rail Injector Purchase and Delivery .....                                 | 10 |
| 3.1. 0445120106 Common Rail Injector Purchase Payment Term .....                               | 10 |
| 3.2. 0445120106 Common Rail Injector Main Sales Markets .....                                  | 10 |
| 3.3. 0445120106 Common Rail Injector Declaration Requirements .....                            | 10 |
| 3.4. 0445120106 Common Rail Injector Shipping Ways .....                                       | 10 |
| 3.5. 0445120106 Common Rail Injector Lead time .....                                           | 10 |
| 3.6. 0445120106 Common Rail Injector Logistics Time for Destination Out of China's Areas ..... | 11 |
| 3.7. 0445120106 Common Rail Injector Packing .....                                             | 11 |
| 4. Company Information .....                                                                   | 12 |
| 4.1. Company Introduction .....                                                                | 12 |
| 4.2. Contact Information .....                                                                 | 13 |
| 5. Copyright Statement .....                                                                   | 13 |

## 0445120106 Common Rail Injector Technical File

### 1. 0445120106 Common Rail Injector Introduction

#### 1.1. 0445120106 Common Rail Injector Basic Information

| Title | 0445120106 Common Rail Injector China Made New |
|-------|------------------------------------------------|
| SKU1  | G1S80445120106                                 |
| SKU2  | DGH130445120106                                |

#### 1.2. 0445120106 Common Rail Injector Common Information

##### 1) Common Rail Injector Exchange Information

| Common Rail Injector Part Number | Compatible Part Number | Re-manufactured Part Number |
|----------------------------------|------------------------|-----------------------------|
| 0445120106                       | 0445120310             | 0 986 AD1 023               |

##### 2) Common Rail Injector Application Information

| Common Rail Injector Part Number | DONGFENG CUMMINS ENGINE (DCEC) Car Model |
|----------------------------------|------------------------------------------|
| 0445120106                       | D5010222526                              |
| 0445120310                       | D5010222526                              |
| 0 986 AD1 023                    | D5010222526                              |

##### 3) Common Rail Injector Matching Information

| Vehicle Brand | Series | Car Model | Engine Model | Production Date | Power (KW) | Horse Power | Emission Standards | Manufacturer | Emissions (L) | Cylinder | Power Source (V) |
|---------------|--------|-----------|--------------|-----------------|------------|-------------|--------------------|--------------|---------------|----------|------------------|
| /             | /      | /         | /            | /               | /          | /           | /                  | /            | /             | /        | /                |

#### 1.3. 0445120106 Common Rail Injector Part Number Common Writing

0445120106, 0 445 120 106, 0445 120 106, 0445120 106, 0 445120106, 0 445120 106, 0445120310, 0 445 120 310, 0445 120 310, 0445120 310, 0 445120310, 0 445120 310, 0 986 AD1 023

#### 1.4. 0445120106 Common Rail Injector Parameter

Adaptation System: Common Rail System

Common Rail Injector Series: 120 Series

Parameter Performance: CRIN2-16

Matching Accessories: Gasket (7.73\*14.36\*1.49)

Common Rail Injector Type: Electromagnetic Common Rail Injector

Support System Maximum Pressure: 1,600

Vehicle Configuration Information: For DONGFENG CUMMINS ENGINE (DCEC)

Common Rail Injector Size: 21.5 cm\*4 cm \*4 cm

Common Rail Injector Net Weight: 0.55kg

Common Rail Injector Gross Weight: 0.6kg

Common Rail Injector Quality: China Made New

Common Rail Injector Package Size: 28cm\*7 cm \*7 cm

Common Rail Injector Type: Diesel Common Rail Injector

**Common Rail Injector MOQ: 4 Pieces**

### 1.5. 0445120106 Common Rail Injector Quality Control

#### 1) Common Rail Injector Testing

All common rail injectors are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

#### 2) Common Rail Injector Assembling

For quality control during the production and installation process of common rail injectors, our company strictly follows the standard product installation data and product installation steps for installation and testing, such as injector stroke test, injector solenoid valve tightening torque test, injector nozzle tightening torque test, etc.

#### 3) Common Rail Injector Inspection

The factory inspection of the common rail injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same common rail injector for more than three times for factory inspection, and the common rail injector installation testing environment are progressed in dust-free workshop.

### 1.6. 0445120106 Common Rail Injector Customized Service

**(1) Common Rail Injector Customized Service Coverage:** Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, common rail injector internal packaging, common rail injector external packaging and labels customized, etc.

| No.   | 1                                                                                   | 2                                                                                   | 3                                                                                    | 4                                                                                     |
|-------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Image |  |  |  |  |
| Name  | Common Rail Injector Nozzle Engraving                                               | Common Rail Injector Housing Lettering And QR Code                                  | Common Rail Injector Solenoid Valve Lettering                                        | Common Rail Injector Box And Label                                                    |

#### (2) Common Rail Injector Customized Service Requirements:

The purchase of [customized common rail injectors](#) are not less than **10 pieces**.

The purchase of [customized common rail injector packages](#) are no less than **1000 pieces**.


When the customized products involve the need of specify logo, the OEM manufacturer is asked to provide trademark authorization and the sample of logo image file.

⚠ **Once the customized common rail injector is sold, it cannot be returned or exchanged if there is no quality problems.**



### 1.7. 0445120106 Common Rail Injector Packing List and Package Size

#### (1) Common Rail Injector Spare Parts List

| No.         | 1                                                                                   | 2                                                                                                      | 3                                                                                                   |
|-------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Image       |    |                       |                  |
| Name        | Common Rail Injector                                                                | O-ring                                                                                                 | Gasket                                                                                              |
| Description | Common rail injector part number: 0445120106                                        | Ensure to meet the standard of the sealing performance between the common rail injector and the engine | Made of brass, used to ensure the tight fit between the common rail injector cap end and the engine |
| No.         | 4                                                                                   | 5                                                                                                      | 6                                                                                                   |
| Image       |    |                       |                  |
| Name        | Nozzle Protective Protective Cover                                                  | Common Rail Injector Oil Inlet Hole Protective Cover                                                   | Common Rail Injector Oil Return Hole Protective Cover                                               |
| Description | Protect nozzle holes from being polluted and blocked                                | Protect oil inlet from being polluted and blocked                                                      | Protect the solenoid valve body and terminals from being damaged by external forces                 |
| No.         | 7                                                                                   | 8                                                                                                      | 9                                                                                                   |
| Image       |  |                     |                |
| Name        | VCI Anti-rust Bag                                                                   | Bubble Bag                                                                                             | Common Rail Injector Packing Box                                                                    |
| Description | Prevent common rail injector from rusting                                           | Prevent the common rail injector from being damaged by external forces                                 | Place common rail injector and common rail injector accessories                                     |

⚠ Minors are forbidden to use the common rail injector assembly, O-ring, gasket, nozzle protective cover, common rail injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.


⚠ O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.

⚠ The nozzle protective cover, the common rail injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

⚠ VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

⚠ The common rail injector and the installation parts should be coated with appropriate sealing oil during installation.

## (2) Common Rail Injector Box Size

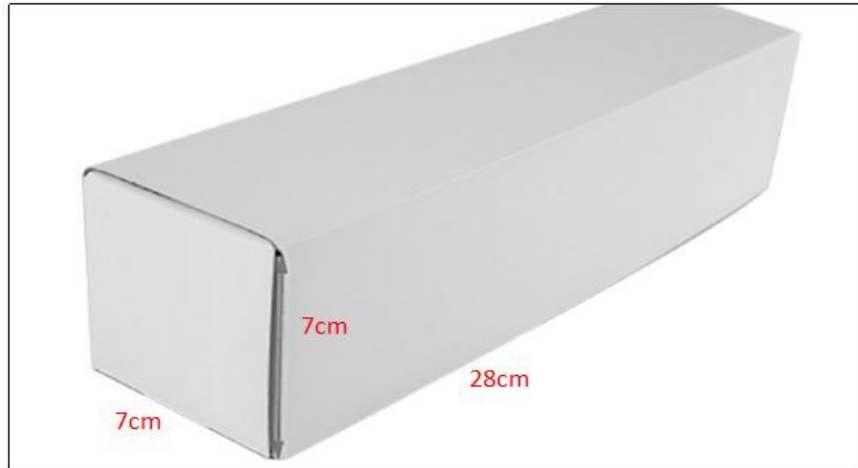

Pic No.1

| No. | Name                     | Common Rail Injector Package Size (cm) |
|-----|--------------------------|----------------------------------------|
| 1   | Common Rail Injector Box | 28*7*7                                 |

### 1.8. 0445120106 Common Rail Injector Testing Standard and Certificate

We can provide the factory quality inspection test report of each common rail injector to ensure that each common rail injector delivered meets the engine performance indicators.

| BOTEN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       | 测试报告       |          | 4.05.2019 10:42:09 |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------------|----------|--------------------|--|------|------|------|--------|------------|----|-----|----------|---|-------|----|---|----------|---|-------|----|------------|-----|---|------|-------|------------|-----|---|-----|------|----------|-----|---|-----|------|----------|-----|---|-----|-----|---------|-----|---|
| 企业名称: _____<br>电话: _____ 地址: _____<br>传真: _____ 检测人: _____<br>客户地址: _____<br>电话: _____ 送检单位: _____<br>传真: _____ 客户姓名: _____<br>检测描述: _____<br>检测名称: 检测器 _____<br>型号-零件号: _____<br>检测范围: _____                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |            |          |                    |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| <b>检测结果</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |       |            |          |                    |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| 检测编号: C05002-6511<br><table border="1"> <thead> <tr> <th>检测项目</th> <th>检测结果</th> <th>标准范围</th> <th>合格/不合格</th> </tr> </thead> <tbody> <tr> <td>ICAR TEST:</td> <td>32</td> <td>4.5</td> <td>20.0±1.5</td> <td>✓</td> </tr> <tr> <td>Back:</td> <td>32</td> <td>4</td> <td>40.0±2.5</td> <td>✗</td> </tr> <tr> <td>WPRM:</td> <td>32</td> <td>125.0±10.0</td> <td>0.0</td> <td>✗</td> </tr> <tr> <td>Max:</td> <td>231.0</td> <td>238.0±14.4</td> <td>0.0</td> <td>✓</td> </tr> <tr> <td>TL:</td> <td>28.4</td> <td>25.0±2.5</td> <td>0.0</td> <td>✓</td> </tr> <tr> <td>UL:</td> <td>14.1</td> <td>12.0±4.0</td> <td>0.0</td> <td>✓</td> </tr> <tr> <td>VE:</td> <td>6.7</td> <td>4.0±1.0</td> <td>0.0</td> <td>✓</td> </tr> </tbody> </table> |       |            |          |                    |  | 检测项目 | 检测结果 | 标准范围 | 合格/不合格 | ICAR TEST: | 32 | 4.5 | 20.0±1.5 | ✓ | Back: | 32 | 4 | 40.0±2.5 | ✗ | WPRM: | 32 | 125.0±10.0 | 0.0 | ✗ | Max: | 231.0 | 238.0±14.4 | 0.0 | ✓ | TL: | 28.4 | 25.0±2.5 | 0.0 | ✓ | UL: | 14.1 | 12.0±4.0 | 0.0 | ✓ | VE: | 6.7 | 4.0±1.0 | 0.0 | ✓ |
| 检测项目                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 检测结果  | 标准范围       | 合格/不合格   |                    |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| ICAR TEST:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 32    | 4.5        | 20.0±1.5 | ✓                  |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| Back:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 32    | 4          | 40.0±2.5 | ✗                  |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| WPRM:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 32    | 125.0±10.0 | 0.0      | ✗                  |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| Max:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 231.0 | 238.0±14.4 | 0.0      | ✓                  |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| TL:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 28.4  | 25.0±2.5   | 0.0      | ✓                  |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| UL:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 14.1  | 12.0±4.0   | 0.0      | ✓                  |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| VE:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 6.7   | 4.0±1.0    | 0.0      | ✓                  |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |
| 检测日期: _____<br>检测地点: _____<br>检测人: _____<br>检测设备: _____<br>检测环境: _____<br>检测人员: _____<br>检测日期: _____<br>检测地点: _____<br>检测人: _____<br>检测设备: _____<br>检测环境: _____<br>检测人员: _____                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |            |          |                    |  |      |      |      |        |            |    |     |          |   |       |    |   |          |   |       |    |            |     |   |      |       |            |     |   |     |      |          |     |   |     |      |          |     |   |     |     |         |     |   |

Pic No.2

### 1.9. 0445120106 Common Rail Injector Warranty Instructions

#### (1) Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the common rail injector inspection equipment as evidence to feed back to the salesman when the common rail injector is abnormal

during using.

Abnormal conditions are properly explained such as : 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. Oil leakage etc.

## **(2) Common Rail Injector Warranty Coverage**

Within 15 days after customer receives the 0445120106 common rail injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445120106 common rail injector has performance problems during the warranty period (6-12 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the common rail injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

**▲ Tips:** For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

## **(3) Common Rail Injector Out of Warranty Coverage**

- ① The warranty period has expired.
- ② Common rail injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.
- ③ Customer disassembles or repairs the common rail injector personally resulting in damage to the common rail injector.
- ④ Common rail injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).
- ⑤ Common rail injector failure or common rail injector damage caused by non-common rail injector design, technology, manufacturing, quality and other issues.
- ⑥ Common rail injector failure due to system pressure exceeding system approved pressure.
- ⑦ Common rail injector failure caused by system voltage exceeding approved voltage.
- ⑧ Common rail injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.
- ⑨ Common rail injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).
- ⑩ Common rail injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.
- ⑪ Common rail injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.
- ⑫ Common rail injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.
- ⑬ Common rail injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.
- ⑭ Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the common rail injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

## 2. 0445120106 Common Rail Injector Technical Support

### 2.1. 0445120106 Common Rail Injector Part Number Location

E.g.: See the common rail injector part number as follows:




Pic No.3

| No. | Name                                    |
|-----|-----------------------------------------|
| A   | brand, logo, part number, series number |
| B   | nozzle part number                      |

### 2.2. 0445120106 Common Rail Injector Application Scenarios

Common rail system is an oil supply method refers to the fuel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to fuel fine filter, high-pressure pump, common rail pipe, and common rail injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injector pressure and the injector process from each other.

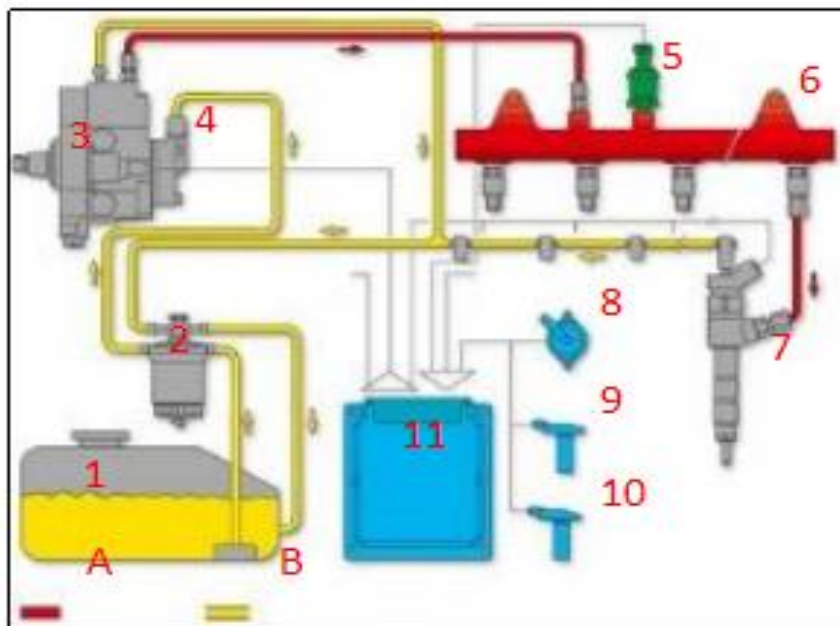

Pic No. 4



| No. | Name               | No. | Name                        | No. | Name                        | No. | Name                      |
|-----|--------------------|-----|-----------------------------|-----|-----------------------------|-----|---------------------------|
| 1   | Tank               | 5   | Common Rail Pressure Sensor | 9   | Engine Crankshaft Sensor    | A   | High Pressure Oil Circuit |
| 2   | Fuel Filter        | 6   | Common Rail Pipe            | 10  | Camshaft Sensor             | B   | Low Pressure Oil Circuit  |
| 3   | High-Pressure Pump | 7   | Common Rail Injector        | 11  | ECU Electronic Control Unit | /   | /                         |
| 4   | Fuel Gear Pump     | 8   | Accelerator Pedal           | /   | /                           | /   | /                         |

### 2.3. 0445120106 Common Rail Injector Installation Precautions

- (1) The replacement of the common rail injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual.
- (2) Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the common rail injector, the fitting clearance of the common rail injector connection, the installation angle and tightening torque of the common rail injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the common rail injector.
- (3) When installing the common rail injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the Common Rail injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.
- (4) Before installing, check whether the common rail injector nozzle gasket has been replaced and installed on the common rail injector.
- (5) When installing the common rail injector, apply lubricant between the common rail injector, fuel nozzle sealing gasket and O-ring.
- (6) Failure to replace the gasket with a new one may result in: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the common rail injector and nozzle to break and cause damage to the engine.
- (7) When installing the common rail injector on the engine, please carefully check the components related to the installation of the common rail injector, such as the common rail injector pressure plate, screw, common rail injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.
- (8) It is forbidden to operate the bare common rail injector for a long time in an environment with serious dust pollution and corrosion to iron products.
- (9) It is forbidden to operate the bare common rail injector for a long time in a strong magnetic field environment.

### 2.4. Reasons For 0445120106 Common Rail Injector Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle oil pump oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve is damaged.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the common rail injector of the vehicle.
- (5) The long-term placement of the common rail injector causes the anti-rust oil to solidify, and the

internal components are stuck or the oil holes are blocked.

⚠ **Before installing, carefully check whether other components in the common rail system except the common rail injector are damaged so as to prevent the common rail injector from not working properly after being replaced.**

## **2.5. Causes of 0445120106 Common Rail Injector Being Damaged**

- (1) Failure to operate correctly according to the engine maintenance manual during disassembly and assembly resulted in damage to the common rail injector.
- (1) The fuel used for the vehicle does not meet the standard, causing damage to the common rail injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (2) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. All above reasons can cause damage to the common rail injector.
- (3) The abrasion of the oil pump produces iron powder and aluminum powder enter the common rail injector and cause damage to the common rail injector.
- (4) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the common rail injector and causing damage to the common rail injector.
- (5) The common rail injector is damaged due to replacement or adjustment of the relevant parts of the common rail injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the common rail injector fails to meet the original standard.
- (6) The engine is overheated and overloaded for a long time working results in damage to the common rail injector.
- (7) The common rail injector will be damaged naturally at the end of its working life.
- (8) The common rail injector is magnetized (common rail injector parts' magnetic exceeded) causing the common rail injector to not work properly.

⚠ **Before replacing the common rail injector, please check the engine parts carefully according to the engine maintenance manual to avoid the common rail injector being damaged again after replacement.**

## **2.6. 0445120106 Common Rail Injector Storage Standard**

### **(1) Choose a Suitable Storage Place**

The warehouse and cargo yard where the common rail injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acids, alkali, salts and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

### **(2) Strict Requirements of Warehousing**

Strict inspections should be carried out when the common rail injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do anti-rust treatment in time. Packaged common rail injectors must be protected from damage.

### (3) Keep The Warehouse Dry And Preventing Moisture

The relative humidity is usually below 70% for the common rail injectors placed in the room, and the corrosion of the common rail injectors is significantly reduced.

Common rail injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

### (4) Stack Properly

After the common rail injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the common rail injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse.

If the common rail injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- ▲ It is forbidden to leave the common rail injector exposed in the air for a long time.
- ▲ It is forbidden to store acids, alkalis, salts and other substances together with the common rail injector.
- ▲ The unpacked common rail injector must be rust-proof during secondary storage.

## 2.7. 0445120106 Common Rail Injector Technical Support Obtaining Methods

- (1) Common Rail Injector Technical File: <https://www.commonrailinjectors.com/download/>
- (2) Common Rail Injector Videos: <https://www.commonrailinjectors.com/videos/>
- (3) Common Rail Injector Encyclopedia: <https://www.commonrailinjectors.com/category/news/encyclopedia/>

## 3. 0445120106 Common Rail Injector Purchase and Delivery

### 3.1. 0445120106 Common Rail Injector Purchase Payment Term

**Payment Terms:** T/T, PayPal, Alipay, WeChat

- ▲ Please contact our salesmen for specific payment information.

### 3.2. 0445120106 Common Rail Injector Main Sales Markets

Common Rail Injector Main Sales Markets: Asia, Europe, North America, South America, Africa etc.

### 3.3. 0445120106 Common Rail Injector Declaration Requirements

We can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

### 3.4. 0445120106 Common Rail Injector Shipping Ways

**Destination in China Areas:** SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

**Destinations Out of China's Areas:** DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

### 3.5. 0445120106 Common Rail Injector Lead time

**Lead Time:** Send out within 3 – 7 working days after receiving payment (Except for special products and special cases) .

### 3.6. 0445120106 Common Rail Injector Logistics Time for Destination Out of China's Areas

#### DHL Logistics Time :

| Country or Region of Departure | Hong Kong, China | Other Countries or Regions of Asia | Australia and New Zealand | Europe | America   | Other Countries |
|--------------------------------|------------------|------------------------------------|---------------------------|--------|-----------|-----------------|
| China's Mainland               | 7 Days           | 7 Days                             | 8 Days                    | 8 Days | 8-12 Days | 7-10 Days       |

#### UPS Logistics Time: Country or Region of Departure: China's Mainland

| Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time | Country of Destination | Estimated Arrival Time |
|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Japan                  | 3 Days                 | UK                     | 5-7Days                | Egypt                  | 5-7 Days               |
| Turkey                 | 5-7 Days               | Singapore              | 3 Days                 | Switzerland            | 5-7 Days               |
| Bahrain                | 5-7 Days               | Latvia                 | 7-10 Days              | New Zealand            | 7-10 Days              |
| Sri Lanka              | 5-7 Days               | Thailand               | 3 Days                 | Austria                | 5-7 Days               |
| Romania                | 5-7 Days               | Vietnam                | 3-5 Days               | Estonia                | 5-7 Days               |
| Malaysia               | 3-5 Days               | Israel                 | 5-7 Days               | Mexico                 | 7-10 Days              |
| France                 | 5-7 Days               | America                | 5-7 Days               | United Arab Emirates   | 5-7 Days               |
| Italy                  | 5-7 Days               | Netherlands            | 5-7 Days               | Bengal                 | 7-10 Days              |
| Lebanon                | 5-7 Days               | Philippine             | 3-5 Days               | Greece                 | 7-10 Days              |
| South Korea            | 3 Days                 | Spain                  | 5-7 Days               | Myanmar                | 5-7 Days               |
| Canada                 | 5-7 Days               | Germany                | 5-7 Days               | Saudi Arabia           | 7-10 Days              |
| Portugal               | 5-7 Days               | Australia              | 5-7 Days               | South Africa           | 7-10 Days              |
| Denmark                | 5-7 Days               | Belgium                | 5-7 Days               | Ukraine                | 7-10 Days              |
| India                  | 7-10 Days              | Qatar                  | 7-10 Days              | Poland                 | 5-7 Days               |
| Indonesia              | 3-5 Days               | Morocco                | 7-10 Days              | Pakistan               | 7-10 Days              |
| Kuwait                 | 7-10 Days              | /                      | /                      | /                      | /                      |

 The logistics time is for reference only and is subject to the actual arrival.

### 3.7. 0445120106 Common Rail Injector Packing

**Domestic Express Packaging:** Usually wrapped in waterproof scotch tape.

**International Express Packaging:** Wrapped with waterproof yellow tape after wrapping the black protective film.

**Pallet Shipping:** Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, also, the products can be



packaged according to customers' requirements.

- ▲ The packing tray is made of plastic and can be recycled.
- ▲ Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.
- ▲ Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.

| No.         | 1                                                                                 | 2                                                                                  | 3                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Image       |  |  |                                |
| Name        | Domestic Express Packaging                                                        | International Express Packaging                                                    | Pallet Shipping                                                                                                   |
| Description | Wrapped by transparent tape                                                       | Wrapped with yellow tape after wrapping black protective film                      | Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties |

#### 4. Company Information



Pic No. 5

##### 4.1. Company Introduction

☎ Mob Phone/WeChat: +86-13410541523

☎ HK Telephone: +852-67653519

☎ Telephone: +86-755-23215133

📍 **Shenzhen Office:** 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

📍 **Shenzhen Office:** Exit C, Qiao Touxu Metro Station, NO. 66 Chongqing Road, Fuhai Avenue, Bao'an District, Shenzhen, China Mainland

📍 **Hong Kong Office:** Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

📍 **After-sales Service Address:** Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: [1.9. 0445120106 Common Rail Injector Warranty Instructions](#))

#### 4.2. Contact Information

| Name | WeChat/ WhatsApp |
|------|------------------|
| Ruby | +86-13410541523  |

#### 5. Copyright Statement

All content published on this file "[0445120106 Common Rail Injector Technical File](#)", including text, pictures, audio, video, programs, web page layout design, etc., belongs to Shenzhen Shumatt Technology Co., Ltd.. Visitors may use the content or services provided on this website for their own personal purposes such as learning, research or appreciation, and other non-commercial or non-profit purposes. Moreover, at the same time, the provisions of copyright law and other relevant laws must be observed, and the content of this website and related contents must not be infringed. In addition, when using any content or services on this website for other commercial purposes, you must obtain the written permission from the relevant copyright holders of Shenzhen Shumatt Technology Co., Ltd. and pay remuneration.